

## 2/2-Way Solenoid Control Valve



- Excellent range (1:200)
- Very good response
- Compact valve design
- Orifice sizes 0.8 ... 4 mm
- Port connection 1/8", 1/4" or sub-base

Type 2873 can be combined with...



**Type 8605**

Digital control electronics  
Cable plug version



**Type 8605**

Digital control electronics  
DIN-rail version



**Type 2508**

Cable plug




**Type 8611**

Universal controller

The direct-acting solenoid control valve Type 2873 (32mm installation width) is used as the regulating unit in control loops. Due to an elastomeric seat seal the valve closes tight (integrated shut-off function), up to the DN specific nominal pressure, see ordering chart on page 3. The plunger of the valve is assembled frictionless, which leads to an extraordinary adjustment characteristic. This valve is particularly suitable for demanding control tasks (high control range, dry gases, etc.).

### Circuit function A



Direct-acting,  
2-way solenoid control  
valve, normally closed

Valve control takes place through a PWM signal<sup>1)</sup>. The duty cycle of the PWM signal determines the coil current and hence the position of the plunger. Optionally the valve can also be driven with DC voltage.

Please note the sizing comments for such a control valve on page 2.

<sup>1)</sup> PWM pulse width modulation

<sup>2)</sup> Pressure data [bar]: Measured as overpressure to the atmospheric pressure, orifice further depends on nominal pressure

<sup>3)</sup> Maximum value, value depends on operating pressure

<sup>4)</sup> Characteristic data of control behaviour depends on process conditions

<sup>5)</sup> by flow measurement

### Technical Data - Valve

<b>Body material</b>	Brass, stainless steel
<b>Seal material</b>	FKM, EPDM on request
<b>Medium</b>	Neutral gases, liquids on request
<b>Pressure range</b>	0 ... 16 bar <sup>2)</sup>
<b>Medium temperature</b>	-10 ... +90 °C
<b>Ambient temperature</b>	max. +55 °C
<b>Power supply</b>	24 V DC
<b>PWM frequency</b>	1200 Hz
<b>Power consumption</b>	9 W
<b>Max. coil current <sup>3)</sup></b>	420 mA
<b>Duty cycle</b>	100 % continuously rated
<b>Port connection</b>	Sub-base, G 1/8, G 1/4, NPT 1/8, NPT 1/4, further on request
<b>Electrical connection</b>	Cable plug Type 2508 according to DIN EN 175301-803, industrial standard Form A
<b>Installation</b>	As required, preferably with actuator in upright position
<b>Typical control data <sup>4)</sup> at PWM control</b>	
Hysteresis	< 5 %
Repeatability	< 0.5 % FS <sup>5)</sup>
Sensitivity	< 0.25 % of FS <sup>5)</sup>
Span	1:200
Response time (10 - 90%)	< 20ms
<b>Protection class - valve</b>	IP65


### Technical data - Control electronics Type 8605 (see separate datasheet)

The valve control can take place through the control electronics of Type 8605, which converts an analogue input signal into a PWM signal.

### Further functional features of the Type 8605 electronic control unit:

- Temperature compensation for coil heating by internal current regulation
- Simple adaptation of zero and span settings
- Ramp function to dampen fast set point changes

Characteristics of a solenoid control valve

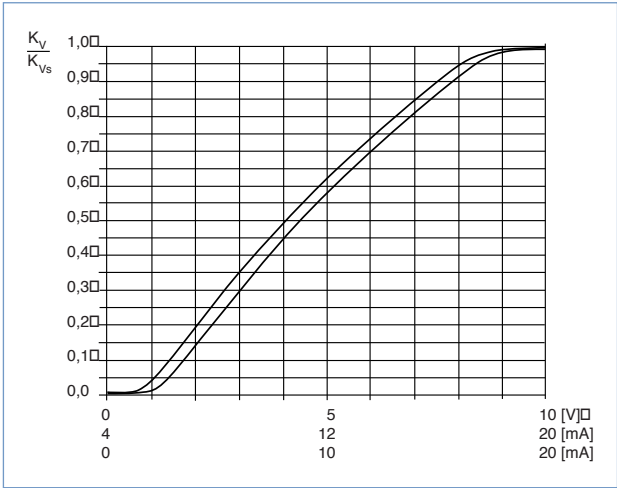

Advice for valve sizing

In continuous flow applications, the choice of appropriate valve size is much more important than with on/off valves. The optimum size should be selected such that the resulting flow in the system is not unnecessarily reduced by the valve. However, a sufficient part of the pressure drop should be taken across the valve even when it is fully opened.

**Recommended value:  $\Delta p_{\text{valve}} > 25\%$  of total pressure drop within the system**

Otherwise the ideal linear valve curve characteristic is changed  
If the differential pressure (difference between inlet and outlet pressure) exceeds half the value of the nominal pressure, the characteristics may change.

**For that reason take advantage of Bürkert competent engineering services during the planning phase!**

Determination of the  $k_v$  value


Pressure drop	$k_v$ value for liquids [m <sup>3</sup> /h]	$k_v$ value for gases [m <sup>3</sup> /h]
Subcritical $p_2 > \frac{p_1}{2}$	$= Q \sqrt{\frac{\rho}{1000 \Delta p}}$	$= \frac{Q_N}{514} \sqrt{\frac{T_1 \rho_N}{p_2 \Delta p}}$
Supercritical $p_2 < \frac{p_1}{2}$	$= Q \sqrt{\frac{\rho}{1000 \Delta p}}$	$= \frac{Q_N}{257 p_1} \sqrt{T_1 \rho_N}$

- $k_v$  Flow coefficient [m<sup>3</sup>/h] <sup>\*)</sup>
- $Q_N$  Standard flow rate [m<sup>3</sup>/h] <sup>\*)</sup>
- $p_1$  Inlet pressure [bar] <sup>\*)</sup>
- $p_2$  Outlet pressure [bar] <sup>\*)</sup>
- $\Delta p$  Differential pressure  $p_1 - p_2$  [bar]
- $\rho$  Density [kg/m<sup>3</sup>]
- $\rho_N$  Standard density [kg/m<sup>3</sup>]
- $T_1$  Medium temperature [(273+t)K]

- <sup>\*)</sup> Measured for water 20°C,  $\Delta p = 1$  bar, via the device
- <sup>\*)</sup> At reference conditions 1.013 bar and 0°C (273K)
- <sup>\*)</sup> Absolute pressure

## Ordering chart

## All valves with FKM seal

Circuit function	Orifice [mm]	Port connection	$k_{vs}$ value water [m <sup>3</sup> /h] <sup>9)</sup>	$Q_{Nn}$ value [l/min] <sup>10)</sup>	Nominal pressure [bar] <sup>11)</sup>	Max. differential pressure [bar] [W]	Item no. Brass	Item no. Stainless steel
	0.8	sub-base FK01	0.018	19	16	8	234 291	234 306
		G 1/8	0.018	19	16	8	234 289	234 305
		NPT 1/8	0.018	19	16	8	236 229	236 230
	1.2	sub-base FK01	0.040	43	12	6	234 293	234 308
		G 1/8	0.040	43	12	6	234 292	234 307
		NPT 1/8	0.040	43	12	6	236 231	236 232
	1.5	sub-base FK01	0.060	65	10	5	234 295	234 310
		G 1/8	0.060	65	10	5	234 294	234 309
		NPT 1/8	0.060	65	10	5	236 233	236 234
	2.0	sub-base FK01	0.100	108	8	4	234 298	234 313
		G 1/8	0.100	108	8	4	234 296	234 311
		NPT 1/8	0.100	108	8	4	236 235	236 236
		G 1/4	0.100	108	8	4	234 297	234 312
		NPT 1/4	0.100	108	8	4	236 237	236 238
	2.5	sub-base FK01	0.150	162	5	2.5	234 300	234 315
		G 1/4	0.150	162	5	2.5	234 299	234 314
		NPT 1/4	0.150	162	5	2.5	236 239	236 241
	3.0	sub-base FK01	0.220	237	3.5	1.8	234 302	234 317
		G 1/4	0.220	237	3.5	1.8	234 301	234 316
		NPT 1/4	0.220	237	3.5	1.8	236 242	236 243
	4.0	sub-base FK01	0.320	345	2	1	234 304	234 319
		G 1/4	0.320	345	2	1	234 303	234 318
		NPT 1/4	0.320	345	2	1	236 244	236 245

<sup>9)</sup>  $k_{vs}$  value: Flow rate value for water, measured at +20 °C and 1 bar pressure differential over a fully opened valve.


<sup>10)</sup>  $Q_{Nn}$  value: Flow rate for air with inlet pressure of 6 bar, 1 bar pressure differential and +20 °C.

<sup>11)</sup> **Pressure data [bar]:** Overpressure with respect to atmospheric pressure, with a differential pressure (difference between inlet and outlet pressure) above half of the nominal pressure there are discontinuities in the valve's characteristics possible.

**Note:** Please note that the valves are delivered without control electronics unit and cable plug (see Accessory Ordering Information).

## Ordering chart - variants for higher differential pressures

## All valves with FKM seal

Circuit function	Orifice [mm]	Port connection	$k_{vs}$ value water [m <sup>3</sup> /h]	$Q_{Nn}$ value [l/min]	Nominal pressure [bar]	Item no. Brass	Item no. Stainless steel
	0.8	G 1/8	0.018	19	16	239 070	239 072
	1.2	G 1/8	0.040	43	12	239 073	239 074
	1.5	G 1/8	0.060	65	10	239 075	239 076
	2.0	G 1/8	0.100	108	8	239 077	239 078
	2.5	G 1/4	0.150	162	5	239 079	239 080
	3.0	G 1/4	0.220	237	3.5	239 081	239 082
	4.0	G 1/4	0.320	345	2	239 083	239 084

**Note:** The following technical data changes compared with the data on page 1

- PWM frequency 800 Hz, span 1:100.
- Other connection variations (sub-base, NPT) on request.



## Further versions on request



**Materials**  
Seal materials EPDM, FFKM



**Analytical**  
Oxygen version  
Parts oil-, fat- and silicon free



**Electrical connection**  
12 V Coil



**Approvals**  
UL  
CSA  
DVGW/ Gas Appliances Directive (GAD)


Ordering chart for accessories

Cable plug Type 2508 according to DIN EN 175301-803 Form A  
The delivery of a cable plug includes the flat seal and fixing screw

Circuitry	Voltage/ Frequency	Item no.
None	0 - 250 V AC/DC	008 376
None, with 3 m cable	0 - 250 V AC/DC	783 573

Control electronics, Type 8605 - please see datasheet

Dimensions [mm]

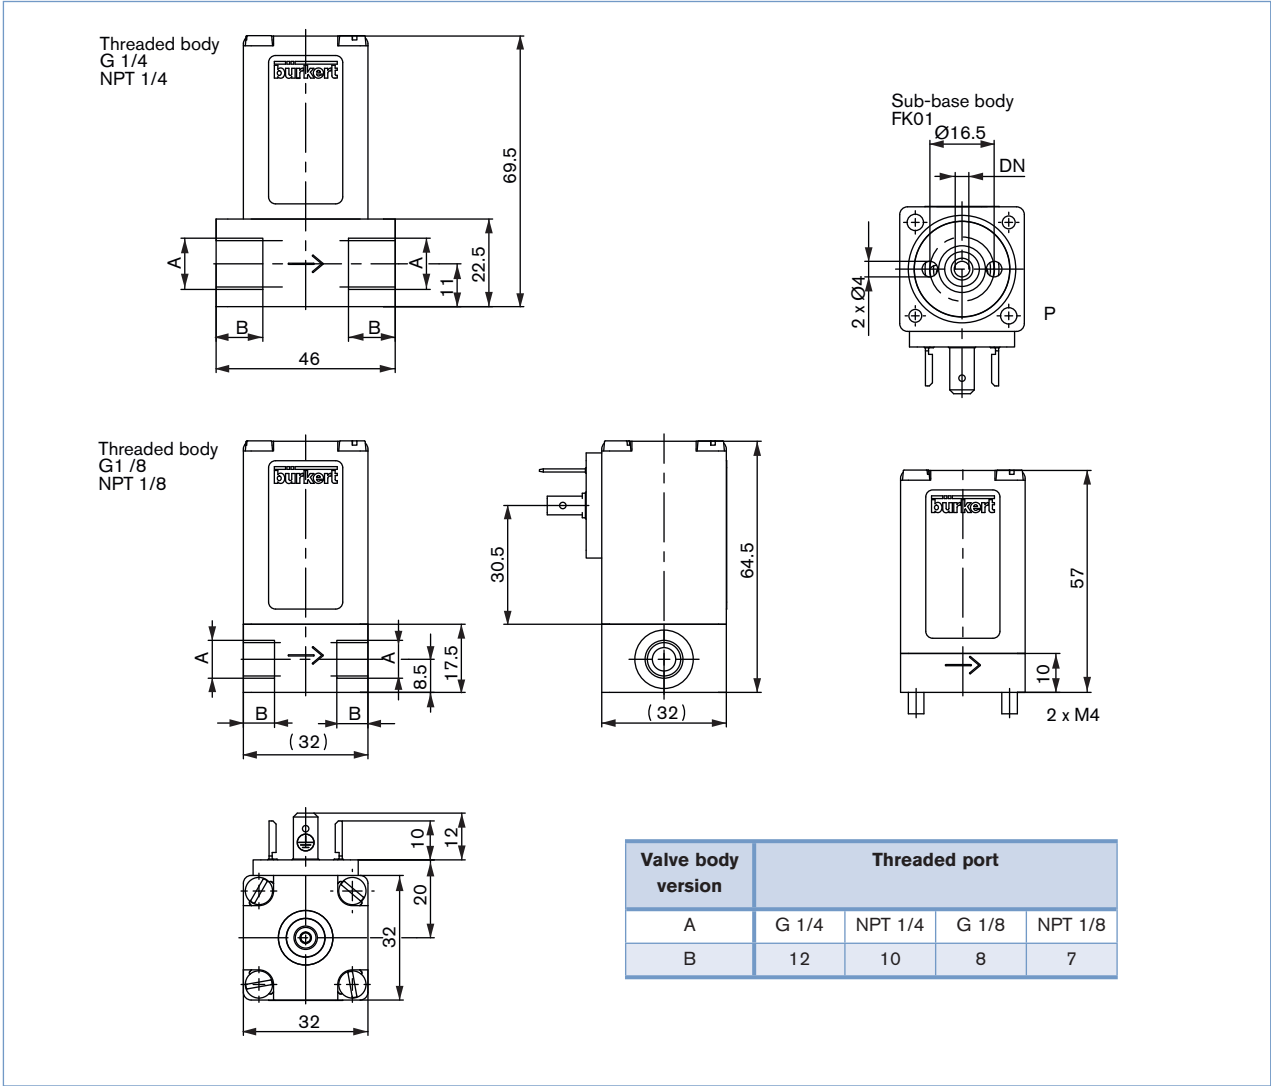

## Note

You can fill out the fields directly in the PDF file before printing out the form.

## Design data for solenoid control valves

▶ Please fill out this form and send to your local Bürkert Sales Centre\* with your inquiry or order

Company	Contact person
Customer No.	Department
Address	Tel./Fax
Postcode/Town	E-mail

☐ = Mandatory fields

Quantity

Requested delivery date

## Process data

<input type="checkbox"/> Medium			
<input type="checkbox"/> State of medium	<input type="checkbox"/> liquid	<input type="checkbox"/> gaseous	
<input type="checkbox"/> Medium temperature		°C	
<input type="checkbox"/> Maximum flow rate	$Q_{nom} =$	Unit:	
<input type="checkbox"/> Minimum flow rate	$Q_{min} =$	Unit:	
<input type="checkbox"/> Inlet pressure at nominal operation	$p_1 =$	barg	
<input type="checkbox"/> Outlet pressure at nominal operation	$p_2 =$	barg	
<input type="checkbox"/> Max. inlet pressure (nominal pressure)	$p_{1max} =$	barg	
<input type="checkbox"/> Ambient temperature		°C	

## Additional specifications

Body material

☐ Brass

☐ Stainless steel

Seal material

☐ FKM

☐ other

**Note** Please state all pressure values as **overpressures with respect to atmospheric pressure** [barg].

## Standard series of solenoid control valves



**Type 2871**

Orifice 0.8 to 2mm  
20mm coil width



**Type 2873**

Orifice 0.8 to 4mm  
32mm coil width



**Type 2875**

Orifice 2 to 8mm  
49mm coil width

To find your nearest Bürkert facility, click on the orange →

[www.burkert.com](http://www.burkert.com)

In case of special application conditions, please consult for advice.

Subject to alteration.  
© Christian Bürkert GmbH & Co. KG

1203/0\_EU-en\_00895221